
QSFP-DD 400G LR4 10km

QSFP-DD transceiver · 400G · 1271 / 1291 / 1311 / 1331 nm (CWDM) · 10 km SMF · Duplex LC · NVIDIA compatible

The GLOBALfiber QDD400G-LR4-NVE is a 400G QSFP-DD transceiver for NVIDIA Ethernet networks. It uses 4 × 100G PAM4 optical lanes at 1271 / 1291 / 1311 / 1331 nm (CWDM) for links up to 10 km SMF over Duplex LC. The module is coded for NVIDIA equipment and is available with Ethernet coding.

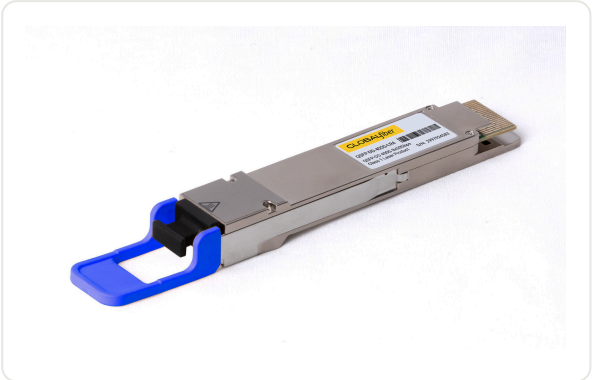

KEY FEATURES

- QSFP-DD form factor
- 400G, 4 × 100G PAM4 optical, 8 × 50G PAM4 electrical
- Wavelength 1271 / 1291 / 1311 / 1331 nm (CWDM)
- Reach up to 10 km SMF
- Duplex LC optical connector
- Max. power consumption 10 W
- Digital diagnostics (DDM), hot-pluggable
- Case temperature 0 to +70 °C

APPLICATIONS & COMPATIBILITY

- NVIDIA switches: Spectrum-3 SN4700, Spectrum-4 SN5400
- Replaces NVIDIA MMS1V90-WR

KEY SPECIFICATIONS

Form factor	QSFP-DD
Data rate	400G
Lanes	4 × 100G PAM4 optical, 8 × 50G PAM4 electrical
Wavelength	1271 / 1291 / 1311 / 1331 nm (CWDM)
Reach	10 km SMF
Connector	Duplex LC
Fiber	Singlemode
Max. power	10 W
Case temperature	0 to +70 °C
Protocol	Ethernet (400GbE)

ORDERING INFORMATION

GLOBALfiber item	Coding	Replaces NVIDIA	Description
QDD400G-LR4-NVE	ETH Ethernet	MMS1V90-WR	QSFP-DD 400G LR4 10km

Choose the coding that matches the host: InfiniBand for NVIDIA Quantum switches, Ethernet for NVIDIA Spectrum switches. Other coding on request: salg@globalfiber.no.

ABSOLUTE MAXIMUM RATINGS

Parameter	Min	Max	Unit
Supply voltage	-0.5	3.6	V
Control input voltage	-0.3	Vcc+0.5	V
Storage temperature	-40	85	°C
Relative humidity (non-condensing)	5	95	%

RECOMMENDED OPERATING CONDITIONS

Parameter	Min	Typ	Max	Unit
Case temperature	0	–	70	°C
Supply voltage	3.135	3.3	3.465	V
Power consumption	–	–	10	W
Link distance	2	–	10000	m

OPTICAL CHARACTERISTICS – TRANSMITTER (PER LANE)

Parameter	Min	Typ	Max	Unit
Lane 0 wavelength	1264.5	1271	1277.5	nm
Lane 1 wavelength	1284.5	1291	1297.5	nm
Lane 2 wavelength	1304.5	1311	1317.5	nm
Lane 3 wavelength	1324.5	1331	1337.5	nm
Side-mode suppression ratio	30	–	–	dB
Average launch power per lane	-2.8	–	4.0	dBm
OMA outer per lane	0.2	–	4.2	dBm
TDECQ	–	–	3.9	dB
Extinction ratio	3.5	–	–	dB
Average power with TX off	–	–	-20	dBm

OPTICAL CHARACTERISTICS – RECEIVER (PER LANE)

Parameter	Min	Max	Unit
Damage threshold	5.0	–	dBm
Average receive power per lane	-9.1	4.0	dBm
Receive power OMA outer	–	4.2	dBm
Stressed sensitivity OMA outer	–	-4.1	dBm
Receiver reflectance	–	-26	dB
LOS assert / de-assert	-20	-12.1	dBm

DIGITAL DIAGNOSTICS (DDM)

Parameter	Range	Accuracy
Case temperature	0 to 70 °C	±3 °C
Supply voltage	0 to Vcc	±0.1 V
TX bias per lane	0 to 100 mA	±10 %
TX power per lane	Operating range	±3 dB
RX power per lane	Operating range	±3 dB

COMPLIANCE

- IEEE 802.3cu (400GBASE-LR4-10)
- QSFP-DD MSA
- CMIS 4.0
- Class 1 laser product
- RoHS compliant

INSTALLATION NOTES

- Use in QSFP-DD host ports.
- Confirm host support, port mode, firmware version and FEC before deployment.
- Check the optical link budget and fiber loss for the full link (singlemode fiber, Duplex LC).
- Keep connectors clean and capped when not in use.

NVIDIA, Quantum, Spectrum, ConnectX, BlueField and DGX are trademarks of NVIDIA Corporation. GLOBALfiber products are third-party compatible and are not manufactured or endorsed by NVIDIA. Specifications are subject to change without notice.