

GF-2P32-1U02A


2 x 32 PLC optical splitter | SC/APC | 1U 19-inch rack

1. Product overview

Passive 2 x 32 optical power splitter based on silica-glass planar lightwave circuit (PLC) technology, with precision-aligned fiber pigtails. The compact 1U 19-inch rack distributes optical signals for PON and FTTx networks.



Original product image from the corresponding product page.

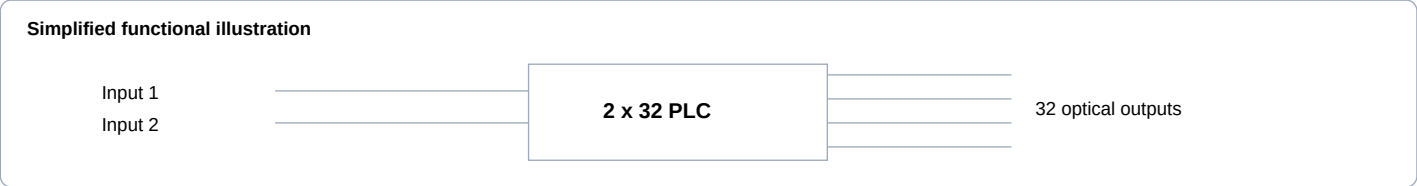

2. Key features

- Low insertion loss and polarization dependent loss; high channel uniformity
- Wide wavelength range and -40 to +85 °C operation
- Passive optical distribution; compact 1U 19-inch rack

3. Applications

GPON / XGS-PON and FTTx; LAN, WAN and metro networks; analog/digital passive optical networks; CATV. Two-input configuration supports protected PON architectures with external active equipment.

4. Technical data

Parameter	Specification
Technology / configuration	PLC; 2 input(s), 32 outputs
Fiber type	SMF-28e or customer specified
Connector / package	SC/APC; 1U 19-inch rack
Dimensions (W x D x H)	440 x 200 x 44 mm
Additional source drawing / table dimensions	482 mm mounting width; 50 x 7 x 4 cm package row

5. Recommended operating conditions

Parameter	Specification
Operating temperature	-40 to +85 °C
Storage temperature	-40 to +85 °C

GF-2P32-1U02A

6. Optical characteristics

Specifications for the 2 x 32 configuration from the original PDF, page 3. Minimum, typical and maximum limits retain their source meaning.

Parameter	Specification
Operating wavelength	1260-1650 nm
Insertion loss - typical	17 dB
Insertion loss - maximum	17.5 dB
Loss uniformity - maximum	2.5 dB
Polarization dependent loss - maximum	0.4 dB
Wavelength dependent loss - maximum	0.8 dB
Temperature dependent loss (-40 to +85 °C) - maximum	0.8 dB
Return loss	= 50 dB
Directivity - minimum	55 dB

7. Digital diagnostics and management

No digital diagnostics or management interface is specified. The splitter is a passive optical component; no active monitoring or protection switching is specified.

8. Safety and regulatory

The original PDF lists compliance with Telcordia GR-1209-CORE and GR-1221-CORE. These references also appear in the product information. No product-specific laser safety class is stated.

9. Ordering information

GLOBALfiber part number	Product description
GF-2P32-1U02A	2 x 32 PLC optical splitter SC/APC 1U 19-inch rack 440 x 200 x 44 mm